



**MANIFATTURA TUBI GOMMA S.p.A.**

Grisignano di Zocco, 36040 (VI) ITALY  
 T. +39 0444.614755 | info@mtgspa.com  
 www.mtgspa.com

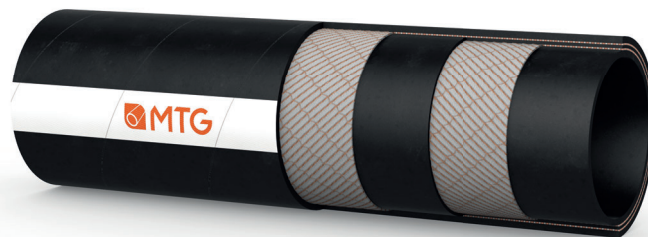

## APPLICATION

- Delivery hose for conveying aggressive chemicals.
- Especially suitable when impermeability to gases is requested.

## CONSTRUCTION

### TUBE

- IIR rubber - butyl (code 160 NE), antistatic ( $R < 10^6 \Omega$ ), black, smooth.
- Resistance: according to MTG Chemical Resistance Chart.

### REINFORCEMENT

- High strength plies of synthetic cord.
- Copper wires on request.

### COVER

- EPDM rubber (code 104N), black, antistatic ( $R < 10^6 \Omega$ ), resistant to abrasion, ozone and weather, smooth, cloth finish.

## STANDARDS

- Execution in accordance with EN 12115:2011.

## TEMPERATURE RANGE

- In accordance with EN 12115:2011.
- Resistant to steam up to +130°C for max. 30 minutes.

## SAFETY FACTOR

- $\geq 4$  times working pressure.

## ELECTRICAL PROPERTIES

- Electrical resistance through the hose wall:  $R < 10^9 \Omega$ .
- Identification symbol:
  - $\Omega/T$  for version without copper wires;
  - $M/T$  for version with copper wires.

## MARKING

- Embossed tape according to EN 12115:2011, lengthwise.



## TECHNICAL SPECIFICATIONS

SIZE TOLERANCES: Inner diameter: EN 12115 - Outer diameter: EN 12115 - Length: ISO 1307

Inner Diameter mm	Outer diameter mm	Wall thickness mm	Working pressure BAR	Burst pressure BAR	Vacuum BAR	Min. bending radius mm	Approx. weight kg/m	Max. length m
13	23	5.0	16	64	-0.50	90	0.35	40
19	31	6.0	16	64	-0.50	125	0.60	40
25	37	6.0	16	64	-0.40	150	0.74	40
32	44	6.0	16	64	-0.40	175	0.90	40
38	51	6.5	16	64	-0.40	225	1.10	40
50	66	8.0	16	64	-0.30	275	1.80	40
51	67	8.0	16	64	-0.30	275	1.85	40
63.5	79.5	8.0	16	64	---	300	2.15	40
75	91	8.0	16	64	---	350*	2.50	40
76	92	8.0	16	64	---	350*	2.55	40
100	116	8.0	16	64	---	450*	3.30	40
102	118	8.0	16	64	---	450*	3.36	40

(\* The bending radius can be reached at a pressure of  $\geq 1$  bar.

Chemical resistance acc. to MTG Chemical Resistance Chart. Above technical data are based on application at room temperature (+20°C). Other sizes are available on request.